


# **CM SAFE CO** **COMMANDER** **T.D.R HIGH SECURITY SAFES**



for the security conscious

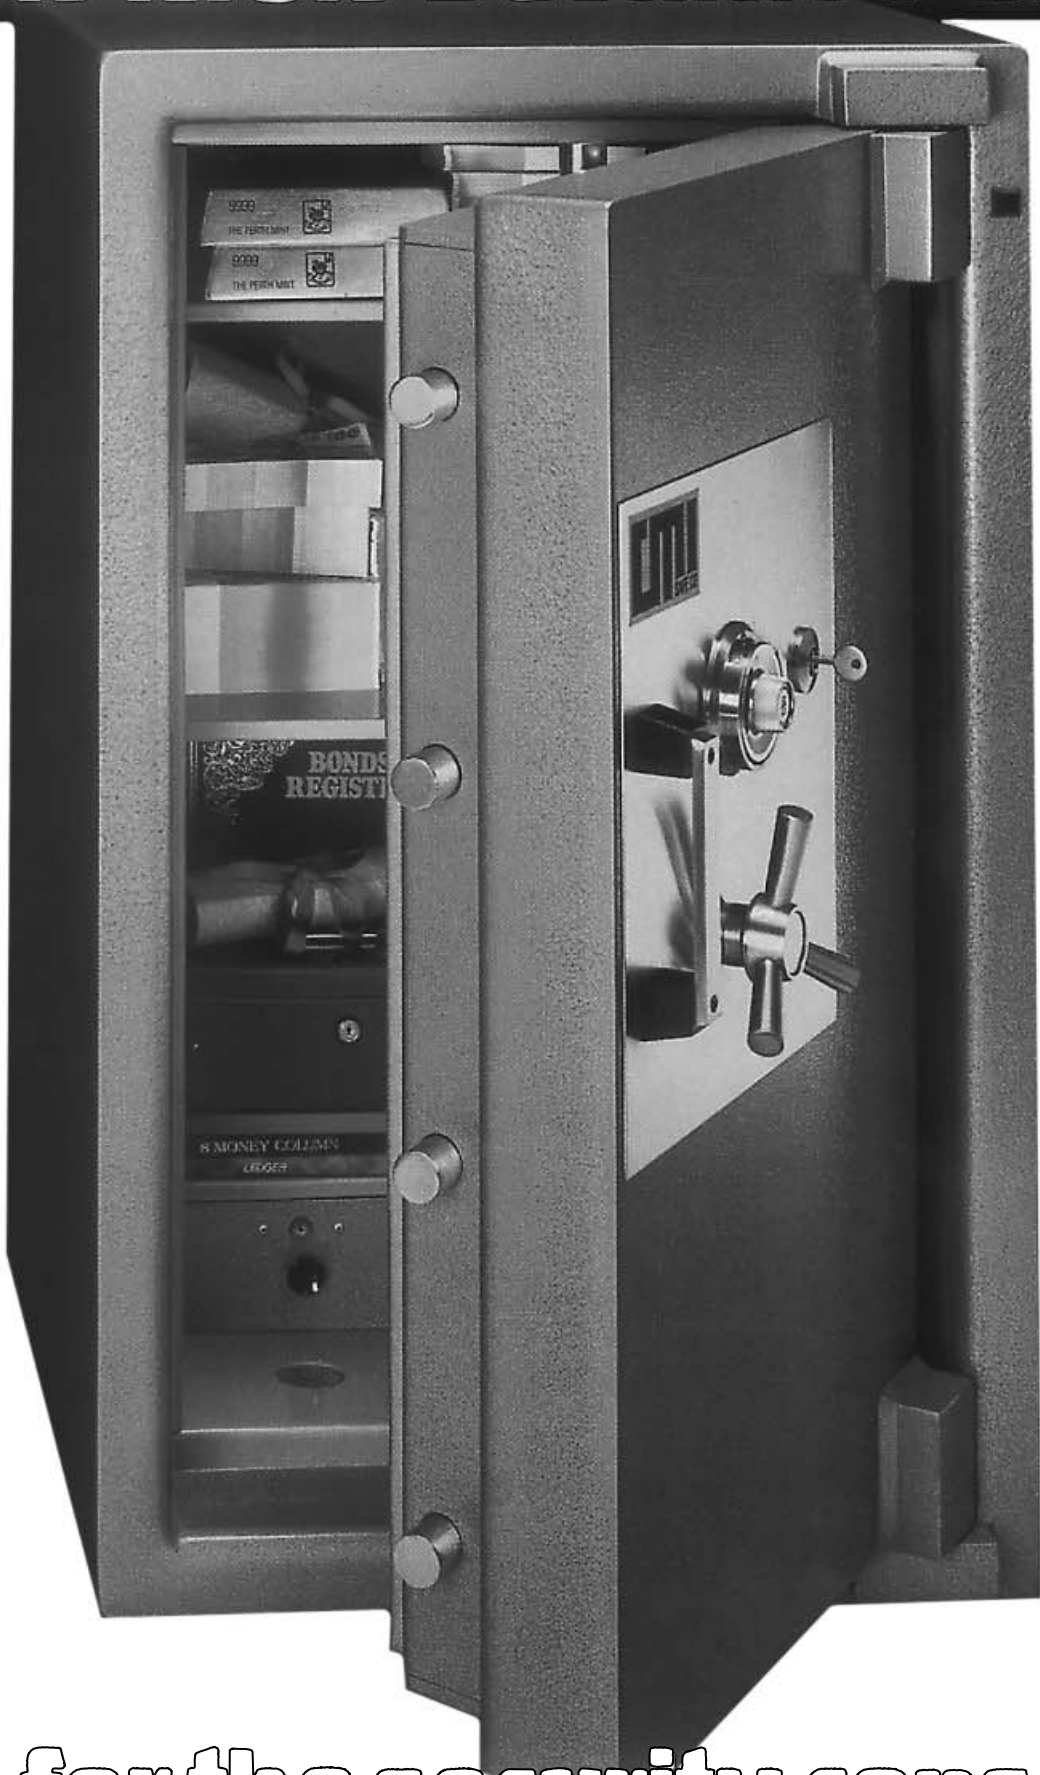

# CMI SAFE CO

**Head Office: 244 WEST STREET, CARLTON, N.S.W. 2218**  
**Phone: (02) 9547 1488 (5 LINES) Fax: (02) 9547 2104**  
 Web site: <http://www.cmisafe.com.au> Email: [sales@cmisafe.com.au](mailto:sales@cmisafe.com.au)

**ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT & TRAVELLING, WITH A 12 MONTH WARRANTY ON LOCKS.**

**CMI COMMANDER RANGE T.D.R.**  
 (Torch and Drill resistant)

The design of the safes and the defences used provide a high level of resistance to:

- **Oxy-Acetylene attack**
- **Drills and abrasive grinders**
- **Explosives and force**
- **Pneumatic and hydraulic tools**

The CMI Safe Co. has been designing, manufacturing and servicing safes throughout Australia for more than 50 years. CMI Safes are used by all State and Federal Governments and many of Australia's leading National Companies, banks and building societies.

**DOOR:** The door of the Commander T.D.R. safe has an overall thickness of 180mm. Importantly the defensive slab section of the door is 100mm thick and contains an alloy which has a proven record of outstanding resistance to all forms of attack mentioned above, especially oxy-acetylene.

**BODY:** The body gives a minimum thickness of 90mm of high-density refractory materials at all points. These materials are bonded between inner and outer walls of specially reinforced steel and become a complete monolith after pouring. The engagement of the door and body effectively result in a continuous sealed cube of exceptional strength and security.

**INSURANCE COVER:** Insurance surveyors have suggested \$80,000.00 as a realistic rating for overnight holding of valuables by the Commander Safe in an unsupported situation.



THE COMMANDER MODEL CR4 IS SHOWN ON THIS PRINTED MATERIAL.

**LOCKING:** A high quality combination lock with 100,000,000 variations is supplied. Changes to the combination are easily made by Commander safe owners. A special glass-activated relocking device and mechanical relockers are provided within the door. A six-lever keylock is also fitted as standard equipment. Each lock can be used independently from the other. Any chosen electronic or duress alarm system can be added to the safe if required.

**BOLTWORK:** Heavy 32 mm dia. bolts provide four-way locking into reinforced sections of the two sides, top and bottom of the safe body and extra protection against lateral attack is included.

**BOLT DOWN FACILITY:** Two recessed bolt-down holes are provided in the base of the safe to allow secure anchoring to any type of floor.

**INTERNAL FITTINGS:** Two half-width drawers locking under a fixed shelf are supplied at the base of the safe with two adjustable shelves on tracking above.

**FIRE RESISTANCE**  
**The Commander Safe has been designed to give one hour fire protection.**

Model	Code	Height	Width	Depth	Weight Kg	Litres	Locking Points	Price
CR2	External	792 mm	640 mm	710 mm	710	122	8	\$
	Internal	610 mm	457 mm	432 mm				
CR3	External	940 mm	640 mm	710 mm	790	152	8	\$
	Internal	762 mm	457 mm	432 mm				
CR4	External	1096 mm	690 mm	710 mm	900	202	10	\$
	Internal	910 mm	508 mm	432 mm				
CR5	External	1096 mm	792 mm	862 mm	1020	327	10	\$
	Internal	910 mm	610 mm	585 mm				
CR6	External	1250 mm	792 mm	862 mm	1180	381	10	\$
	Internal	1066 mm	610 mm	585 mm				
CR7	External	1400 mm	792 mm	862 mm	1310	435	12	\$
	Internal	1220 mm	610 mm	585 mm				
CR8	External	1550 mm	792 mm	862 mm	1520	489	12	\$
	Internal	1370 mm	610 mm	585 mm				
CR9	External	1700 mm	792 mm	862 mm	1740	542	12	\$
	Internal	1520 mm	610 mm	585 mm				
CR10	External	1850 mm	792 mm	862 mm	1850	595	12	\$
	Internal	1670 mm	610 mm	585 mm				

(Important: Please allow 55mm projection for door furniture on depth measurement)

CD PONT 011 KB 1499

CMI Safe Co. reserve the right to alter specifications without notice or obligation.

To deliver level access metro	\$
To bolt to floor	\$

Agents in all major cities throughout Australia.



**MADE IN AUSTRALIA**