



COMMERCIAL GRADE STRONGROOM DOOR AND FRAME

FIRE, FORCE, DRILL AND EXPLOSIVE RESISTANT

- **DOOR:** Total thickness 100mm. The "Security" door provides a heavy steel front section supported by drill-resistant hardened plate over all vital lock areas, c/w two relocking devices.
- **BOLTWORK:** Heavy 25mm dia. bolts of high grade steel provide two-way locking into the specially strengthened lock chamber sections at front and rear edges of the door.
- **LOCKING:** A high quality one million change combination lock and a six lever pick resistant key lock.
- **FRAME:** Heavy steel frame 125x125x6mm with 125x18mm threshold plate at bottom.
- **HINGES:** Adjustable heavy duty with hardened pins on ball bearing axis (Pre-lubricated)
- **FIRE RESISTANT:** Fire pan fitted to rear of door with approved high fire resistance compound.
- Internal release mechanism standard.
- Door may be ordered with either left or right hand hinging.
- Door can be manufactured to suit any size wall opening.
- Digital combination, duress and time delay locks may be fitted as an optional extra.



CMI SAFE CO.

A.C.N. 057 073 033

Head Office:

244 WEST STREET, CARLTON, N.S.W. 2218

Telephone: (02) 547 1488 (5 lines) Fax: (02) 547 2104

Agents in all major cities throughout Australia

ASIAL

MEMBER AUSTRALIAN SECURITY
INDUSTRY ASSOCIATION LIMITED




100% Australian Owned
and Manufactured



COMMERCIAL GRADE STRONGROOM DOOR AND FRAME

FIRE, FORCE, DRILL AND EXPLOSIVE RESISTANT

MODEL	WEIGHT	DOOR STYLE	CLEAR OPENING	CLEAR MASONRY OPENING REQUIRED
CD2	305kg	1980 x 760	1950 x 710	2030 x 830
CD4	410kg	1980 x 910	1950 x 860	2030 x 980

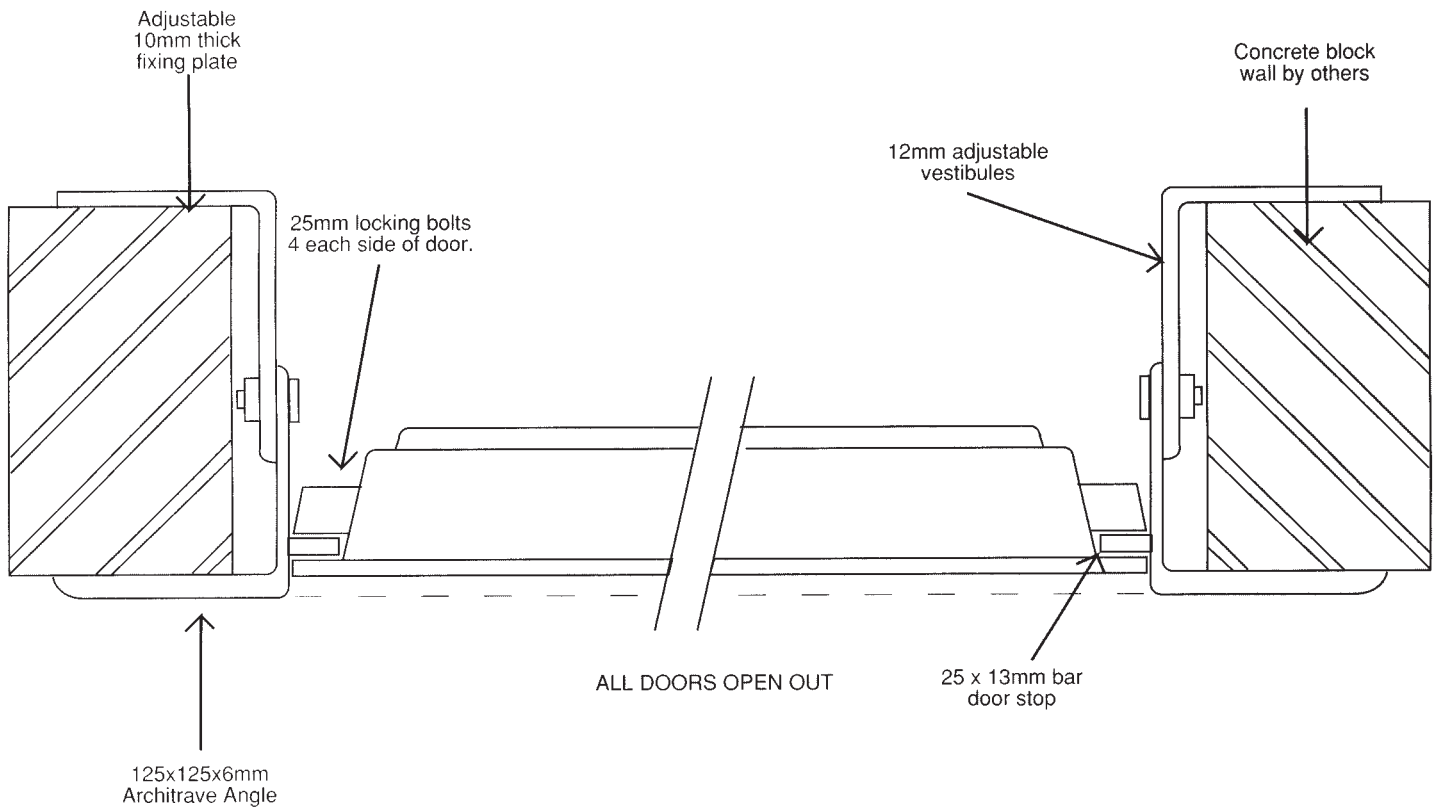

CMI SAFE CO. RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT NOTICE OR OBLIGATION

CMI SAFE CO.

A.C.N. 057 073 033

Head Office:

244 WEST STREET, CARLTON, N.S.W. 2218

Telephone: (02) 547 1488 (5 lines) Fax: (02) 547 2104

Agents in all major cities throughout Australia

ASIAL

MEMBER AUSTRALIAN SECURITY
INDUSTRY ASSOCIATION LIMITED



100% Australian Owned
and Manufactured